



PAROC PRO SLAB 160

Stone wool slab


Thermal insulation of flat surfaces in industrial equipments and vessels.

COMPLIANCE AND PERFORMANCE		
ASTM C 612	STANDARD SPECIFICATION FOR MINERAL FIBRE BLOCK AND BOARD THERMAL INSULATION	TYPE IVA
ASTM E 84	Surface Burning Characteristics	Flame Spread index 0 Smoke Development Index < 5
ASTM C 411	Hot Surface Performance	In Compliance with ASTM C 612 1400°F (760°C)
ASTM C 447	Maximum Use Temperature	In Compliance with ASTM C 612 1400°F (760°C)
ASTM C 303	Nominal density	10 lb/ft ³
ASTM C 303	Dimensions	In Compliance with ASTM C 612
ASTM C 795	Stainless Steel Stress Corrosion Specification as per Test Method C 871 U.S. Nuclear Regulatory Commission, Reg. Guide 1.36	Conforms
ASTM C 356	Linear Shrinkage, length and width	< 1,0 % @ 1200°F (650°C)
ASTM C 1335	LOI and Shot Content	LOI < 2,5 % Shot content < 20,0 %
ASTM C 1104	Water vapor sorption	< 0,25 % by weight
ASTM C 177	Thermal conductivity curves in W/mK and in Btu.in./h.ft ² , F	According to the table and curve below

DIMENSIONS	
THICKNESS	WIDTH x LENGHT
1, 2, 3, 4, 5 inches	24 x 48 inch

PAROC stone wool products are capable of withstanding high temperatures. The binder starts to outgas when its temperature exceeds approximately 400 F. The insulating properties remain unchanged, but the compressive stress weakens. The melting temperature of stone wool products is over 1800 F.

THERMAL CONDUCTIVITY OF PAROC PRO SLAB 160

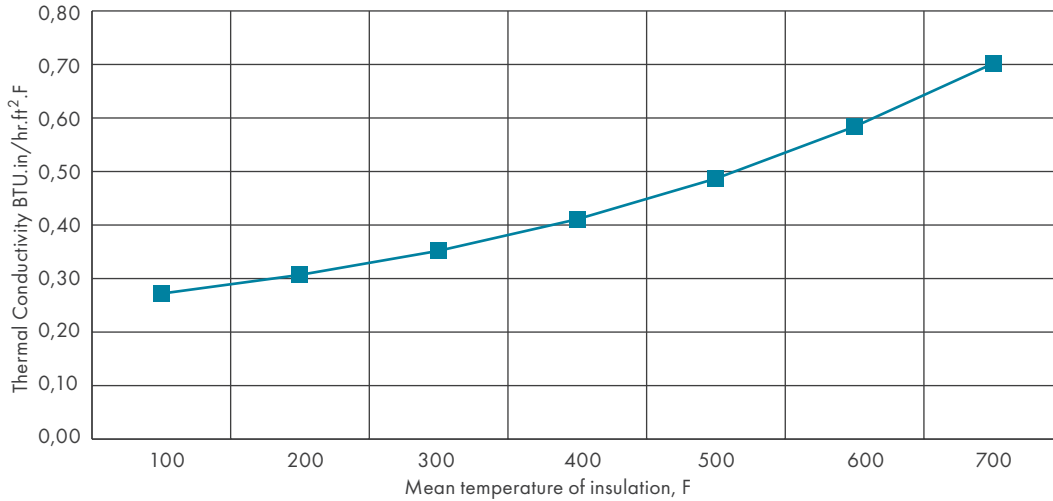

The information in this data sheet describes the conditions and technical properties of the disclosed products, valid at the time of publication of this document and until replaced by the next printed or digital version. The latest version of this data sheet is always available on the Paroc website. Our information material presents applications for which the functions and technical properties of our products have been approved. However, the information does not mean a commercial guarantee. We do not assume liability of the use of third party components used in the application or the installation of our products. We cannot warrant the suitability of our products if used in an area or conditions which are not provided in our information material. As a result of constant further development of our products we reserve the right to make alterations to our information material at any time. PAROC is a registered trademark of Paroc Group.

Note: As Paroc Group Oy has no control over installation design and workmanship, accessory materials or application conditions, Paroc Group Oy does not warranty the performance or results of any installation containing PAROC products. Paroc Group Oy's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.

This data sheet is valid in following countries: The United States

June 2015
© Paroc Group
1006TIUS0615

PAROC OY AB
Technical Insulation
Energiakuja 3, P.O. Box 240,
FI-00181 Helsinki, Finland

A MEMBER OF PAROC GROUP