


PARAFON Palette

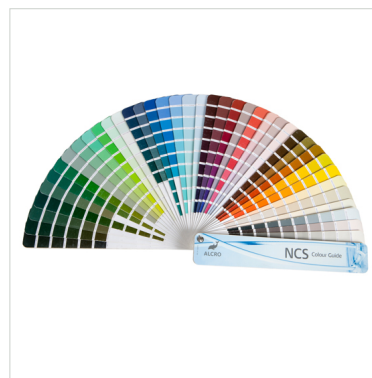

Certification Number

0809-CPR-1013 / Eurofins Expert Services Ltd, P.O. Box 1001, FI-02044 VTT, Finland

Short Description

PARAFON Palette is a painted acoustic tiles for creative suspended ceiling solutions. Supplied in any NCS colour and with a variety of edge configurations for installation in a grid system or directly against a ceiling or wall.

Application

Offices, nurseries, schools, public baths, commercial premises

Usage Conditions

May be used continuously in 95 % relative humidity at a temperature of 30 °C, occasionally also at 100 % and 40 °C.

Dimensions

Dimensions		
Thickness	Width x Length	Weight
Edge A:		
18 mm	600 x 600 mm	1,4 kg/m ²
18 mm	600 x 1200 mm	1,4 kg/m ²
40 mm	600 x 600 mm	2,8 kg/m ²
40 mm	600 x 1200 mm	2,8 kg/m ²
.		
Edge B:		
18 mm	600 x 600 mm (fixed size)	2,5 kg/m ²
40 mm	600 x 600 mm (fixed size)	5,6 kg/m ²
.		
Edge C:		
18 mm	600 x 600 mm (fixed size)	2,5 kg/m ²
.		
Edge D:		
18 mm	600 x 600 mm (fixed size)	2,5 kg/m ²
.		
Edge D2:		

Facing Material

Painted glass fiber tissue. Backside:
 thin glass fiber tissue.

Edges

Treatment of Edges

Depending on edge type - from
 sealed to fully painted edges.

Installation

Installation with Armstrong Prelude suspension system. For edge type B and C, mounting directly to the substrate by gluing or with fixing brackets. Palette in Step installation is glued directly to the substrate.

Suspension Height

Direct fixing

Tile thickness	Edge B	Edge C
18 mm	20 mm	20 mm
40 mm	42 mm	

Minimum suspension
 height for removal

Installation in exposed or concealed
 suspension system.

Tile thickness	Edge A	Edge D
15-18 mm	90 mm	60 mm
25 mm	110 mm	
40 mm	160 mm	

Tile thickness	Edge D2	Edge E
15-18 mm		90 mm
25 mm	70 mm	
40 mm		170 mm

Minimum construction height using direct brackets is 52 mm.

Minimum suspension
 height for not removable







Maintenance

Using a soft brush, by vacuum cleaning or by wiping with a damp cloth or sponge.

Disposal and Recycling

May be used as thermal insulation or taken to a dump. No restrictions.

Sound Absorption Curves



Head Office: PAROC GROUP, P.O. Box 240 (Energiakuja 3), FI-00181 Helsinki Finland, Tel. +358 46 876 8000, www.paroc.com

The information in this brochure describes the conditions and technical properties of the disclosed products, valid at the time of publication of this document and until replaced by the next printed or digital version. The latest version of this brochure is always available on the Paroc website. Our information material presents applications for which the functions and technical properties of our products have been approved. However, the information does not mean a commercial guarantee. We do not assume liability of the use of third party components used in the application or the installation of our products. We cannot warrant the suitability of our products if used in an area or conditions which are not provided in our information material. As a result of constant further development of our products we reserve the right to make alterations to our information material at any time. PAROC is a registered trademark of Paroc Group. This data sheet is valid in following countries: international use (general information).