

EPD reference: NEPD-2392-1128-EN


## Paroc AB

PAROC WAS 35, ventilated facade system, density 70 kg/m<sup>3</sup>, R = 1

This product can not support collecting BREEAM-NOR credits

The assessment is valid until 06.03.2024, provided published on [www.byggeportalen.no/EcoProduct](http://www.byggeportalen.no/EcoProduct)  
This printed report is valid until 31.12.2021.

No. 5571

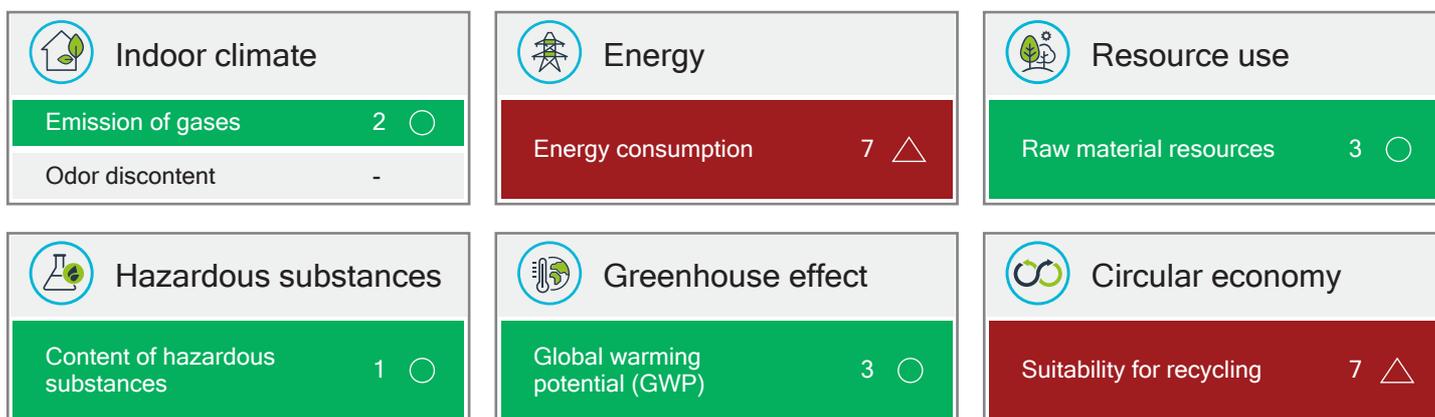

**Manufacturer:** Paroc AB

**Generic product:** Stone wool

**Product group:** Insulation materials

**Assumed technical lifetime:** 50 years

**Moisture resistance:** Moderate

**Cleanability:** Not applicable

**Reference value GWP:** 3.39 kg/m<sup>2</sup> for R=1<sup>\*)</sup>

**Structure Components:**

231 Bearing exterior walls

232 Non-bearing exterior walls

**Distribution of energy consumption used as raw materials:**

11.8 % renewable primary energy

88.2 % non renewable primary energy

**Sequestration of biogenic carbon:**

-3.17 kg of biogenic carbon is stored in the product

<sup>\*)</sup> The reference value for global warming potential is based on other products within the same product group registered in the ECOproduct database. This reference value is adjusted 31.12. each year and may affect the score for GWP in the subsequent year.

ECOproduct assesses the actual climate and environmental impact of construction products within the four categories above, based on a product specific environmental declaration (EPD) according to ISO 14025 and NS-EN 15804.

The product is ranked on a scale of 1-8 in each of these environmental categories, where 1 is the best. The green, white and red symbol appears in addition to the characters in order to visualize the assessment score.

#### Ranking:

- 1 Excellent
- 2 Good
- 3 Average to good
- 4 Average
- 5 Adjoining average
- 6 Marginally average
- ▲ 7 Poor
- ▲ 8 Very poor (or incomplete)