


# PAROC AluCoat

PAROC AluCoat is a glass-fiber scrim reinforced aluminium facing with an adhesive layer, used on PAROC stonewool products.

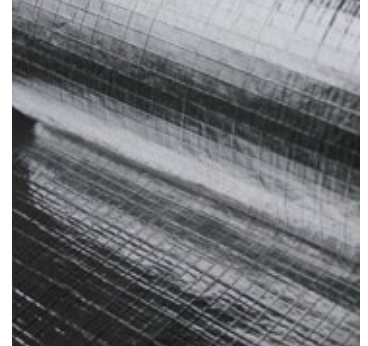

## Product datasheet

1.7.2025

<b>Properties</b>	Total grammage	60 - 88.4 g/m <sup>2</sup> , tolerance (-5...+6 g/m <sup>2</sup> )
	Aluminium layer thickness	0.012-0.018 mm

<b>Product characteristics</b>	<b>Fire Classification (IMO 2010 FTP Code Annex 1)</b>	<b>Type-Examination (Module B) certificate(s)</b>
	Part 5, Low Flame-Spread characteristics	74479/A2 MED, 74467/A2 UK
	<b>Quality system</b>	<b>Surveillance (Module D) certificate(s)</b>
	MED	SMS.MED2.D/94701/A.2, SMS.MED2.D/93834/A.4
UK	SMS.UK.D/94701/A.2, SMS.UK.D/93834/A.3	

Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Because conditions of use may vary and are beyond our control, Paroc makes no representation about, and is not responsible or liable for the accuracy or reliability of data associated with particular uses of any product described herein. Paroc reserves the right to modify this document without prior notice. PAROC is a registered trademark of Paroc Group Oy. This data sheet is valid in following countries: International.